


## Interface controllers can be made from hacked computer mice.




1. Crack open the mouse to liberate the controller

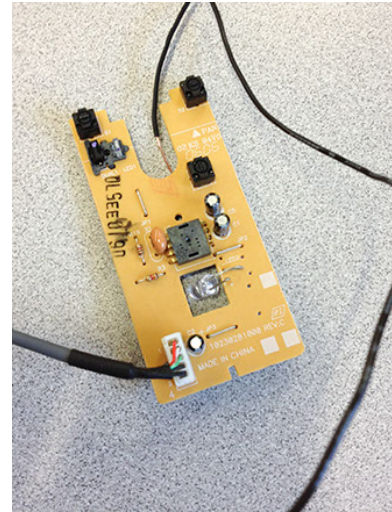


2. Tinker to locate the 'click' point connections



3. Connect the 'click' points to something

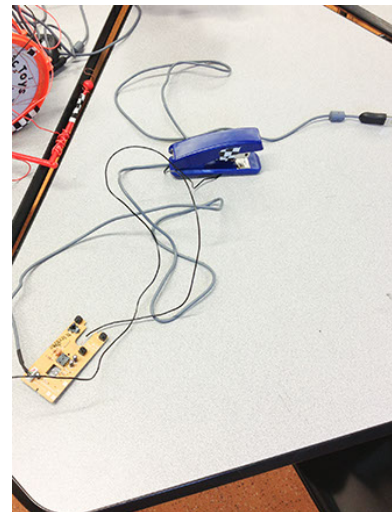

4. The controller leads connected to a stapler

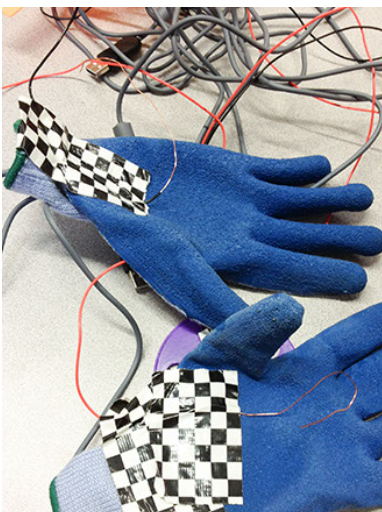

5. The wires taped into these gloves are the new click point